

제품명 : FL13-D22

제품 디자인



제품치수	Ø28 x 1,200mm	SMPS	오스람
중량	161g	베이스	G13

제품사양서

모델명	소비 전력 (W)	입력 전압 (Vac)	수명 (hrs)	광효율 (lm/W)	총광속 (lm)	색온도 (K)	연색 지수 (Ra)	빔각도	온도 (℃)
FL13-D22- 12T8G13-DB	13.5	DC 36	50,000	172	2 300	5700	80	160°	-20~40

FL13-D22

Polar Diagram

FL13-D22

Cone Diagram

	Center Beam LUX	Beam Width
1.3m	260.10 LUX	3.9m
2.7m	65.03 LUX	7.8m
4.0m	28.90 LUX	11.8m
5.3m	16.26 LUX	15.7m
6.7m	10.40 LUX	19.6m
8.0m	7.22 LUX	23.5m

Beam Spread: 111.5°

제품명 : LPE25D, LPE25T Series

제품 디자인




SMPS	오스람	중량(g)	1,840g
------	-----	-------	--------

제품사양서

모델명	소비 전력 (W)	입력 전압 (Vac)	역률 (PF)	광효율 (lm/W)	총광속 (lm)	색온도 (K)	연색 지수 (Ra)	제품 사이즈 (mm)
LPE25D-DBL1280	25	220	0.9 이상	160	26 000	5700	80	1280 x 320
LPE25D-DBL640	25	220	0.9 이상	160	26 000	5700	80	640 x 640
LPE25T-DBL1198	25	220	0.9 이상	160	26 000	5700	80	1198 x 298
LPE25T-DBL598	25	220	0.9 이상	160	26 000	5700	80	598 x 598

LPE25D

Polar Diagram

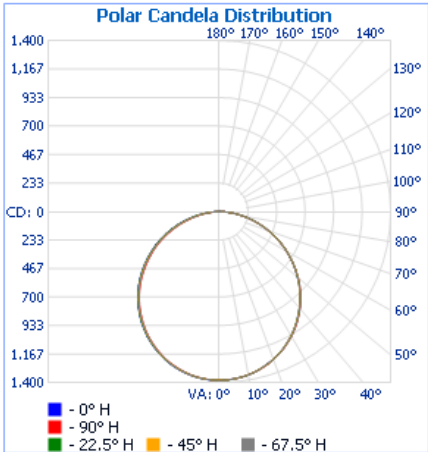

LPE25D


Cone Diagram

	Center Beam LUX	Beam Width
1.3m	778.23 LUX	4.1m 4.1m
2.7m	194.56 LUX	8.3m 8.1m
4.0m	86.47 LUX	12.4m 12.2m
5.3m	48.64 LUX	16.5m 16.2m
6.7m	31.13 LUX	20.7m 20.3m
8.0m	21.62 LUX	24.8m 24.3m

■ Vert. Spread: 114.3° ■ Horiz. Spread: 113.3°

제품명 : SSL60 / SSL100 Series

제품 디자인

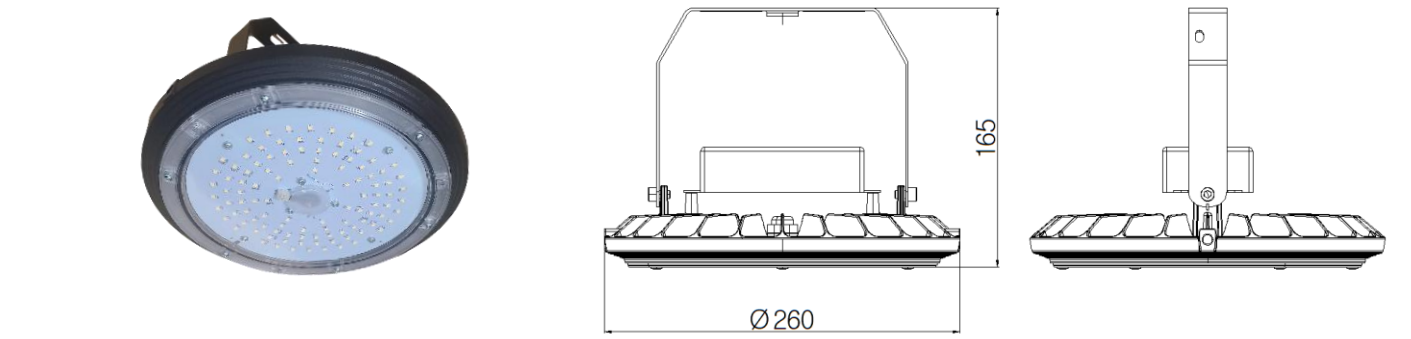


제품치수	Ø280 x 165mm	SMPS	필립스
중량	2,100g	IP등급	IP 68

제품사양서

모델명	소비 전력 (W)	입력 전압 (Vac)	역률 (PF)	광효율 (lm/W)	총광속 (lm)	색온도 (K)	연색 지수 (Ra)	빔각도	사용 온도 (℃)
SSL60-KE-BRB	60	220	0.9 이상	180	10 800	5700	80	115°	-20~40
SSL100-KE-BRB	100	220	0.9 이상	180	18 000	5700	80	115°	-20~40

SSL60

Polar Diagram

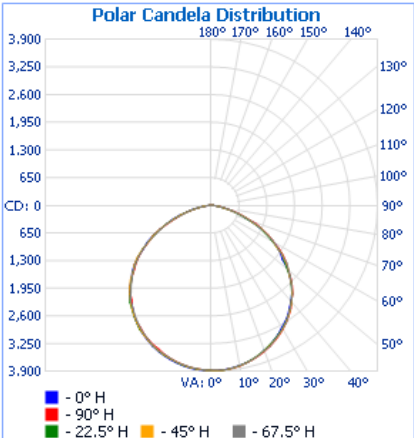

SSL60


Cone Diagram

Illuminance at a Distance		
	Center Beam LUX	Beam Width
1.3m	2,184.27 LUX	4.0m 4.1m
2.7m	546.07 LUX	8.0m 8.1m
4.0m	242.70 LUX	12.0m 12.2m
5.3m	136.52 LUX	16.0m 16.2m
6.7m	87.37 LUX	19.9m 20.3m
8.0m	60.67 LUX	23.9m 24.3m

Vert. Spread: 112.5° Horiz. Spread: 113.3°

제품명 : DBL / DBE Series

제품 디자인

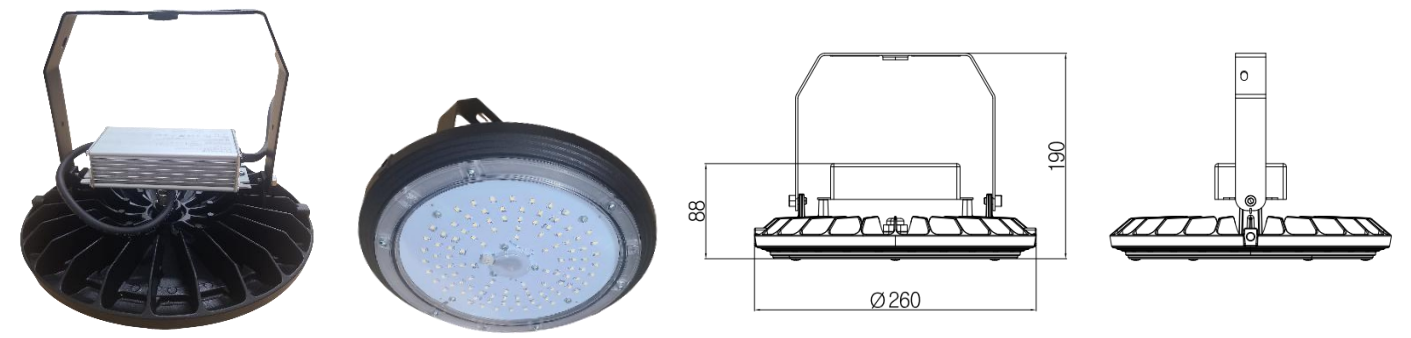


제품치수	Ø280 x 190mm	SMPS	오스람
중량	2,100g	IP등급	IP 68

제품사양서

모델명	소비 전력 (W)	입력 전압 (Vac)	역률 (PF)	광효율 (lm/W)	총광속 (lm)	색온도 (K)	연색 지수 (Ra)	빔각도	사용 온도 (℃)
DBL60-KE-BRB	60	220	0.9 이상	130	7 800	5700	80	115°	-20~40
DBL80-KE-BRB	80	220	0.9 이상	130	10 400	5700	80	115°	-20~40
DBL100-KE-BRB	100	220	0.9 이상	130	13 000	5700	80	115°	-20~40
DBL120-KE-BRB	120	220	0.9 이상	130	15 600	5700	80	115°	-20~40
DBL150-KE-BRB	150	220	0.9 이상	130	19 500	5700	80	115°	-20~40
DBE80-KE-BRB	80	220	0.9 이상	120	9 600	5700	80	115°	-20~40
DBE100-KE-BRB	100	220	0.9 이상	120	12 000	5700	80	115°	-20~40
DBE120-KE-BRB	120	220	0.9 이상	120	14 400	5700	80	115°	-20~40
DBE150-KE-BRB	150	220	0.9 이상	120	18 000	5700	80	115°	-20~40

제품명 : DBL200



제품 디자인

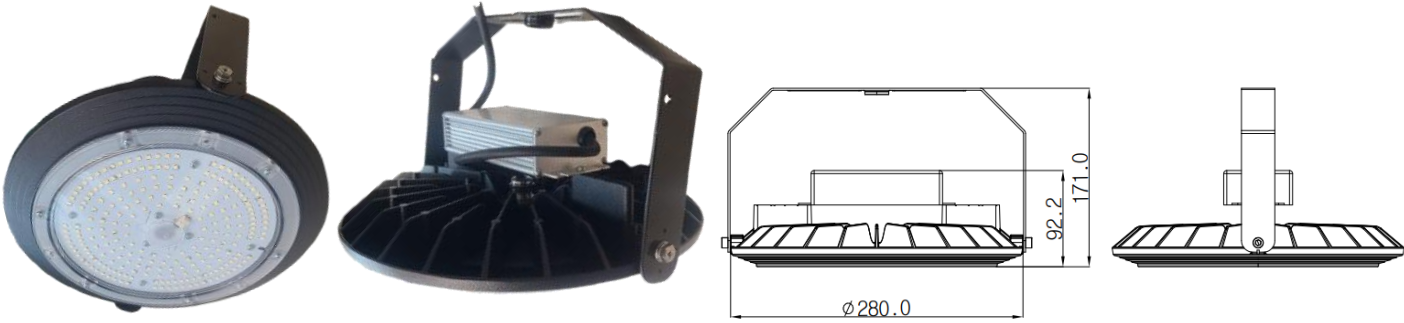

제품치수	Ø280 x 171mm	LED_SMPS	서울반도체_오스람
중량	2,600g	IP등급	IP 68

제품사양서





모델명	소비 전력 (W)	입력 전압 (Vac)	역률 (PF)	광효율 (lm/W)	총광속 (lm)	색온도 (K)	연색 지수 (Ra)	빔각도	사용 온도 (℃)
DBL200-KE-BRB	200	220	0.9 이상	135	27 000	5700	80	115°	-20~40

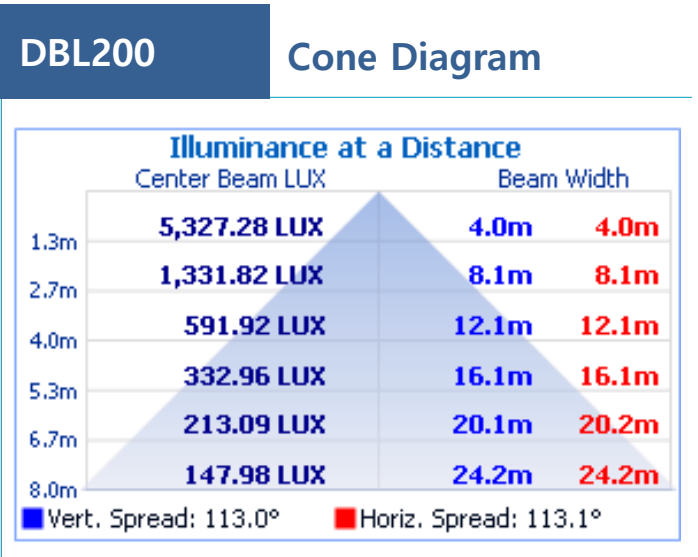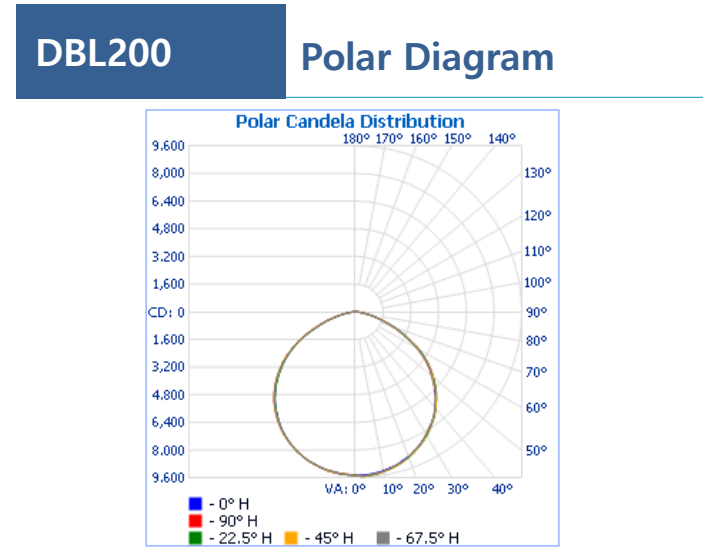

제품명 : Flood Light [300,400,600,800,1000,1200,1500W]

제품 디자인

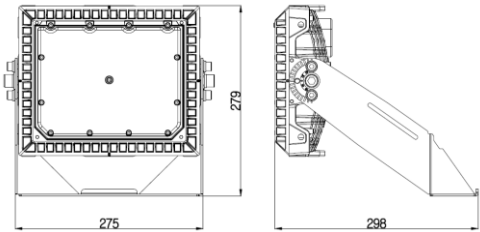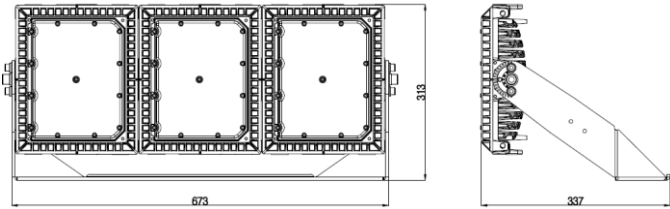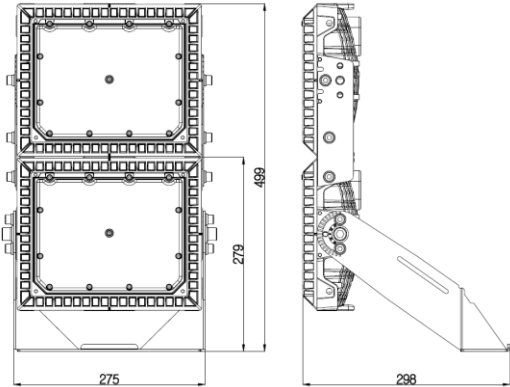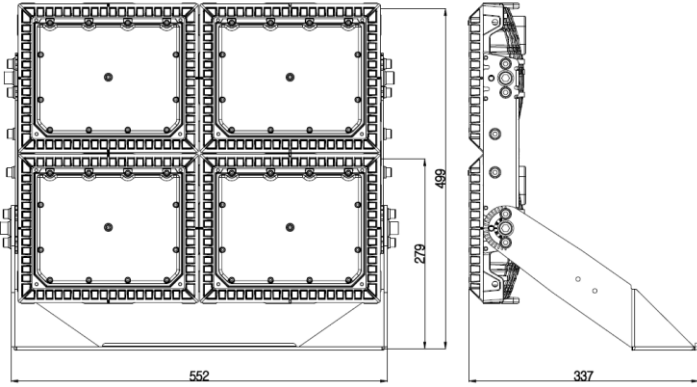

LED_SMPS	서울반도체_이파워	IP등급	IP 67
SML300H / 400H		SML1000H	
			
제품치수	275 x 298 x 279 mm	제품치수	673 x 337 x 313 mm
중량	5.4 kg (SMPS 제외)	중량	16.8 kg (SMPS 제외)
SML600H / 800H		SML1200H / 1500H	
			
제품치수	275 x 298 x 499 mm	제품치수	552 x 337 x 499 mm
중량	8.3 kg (SMPS 제외)	중량	21.5 kg (SMPS 제외)

※ 본 제품사양 내용은 품질개선을 위해 예고없이 수정될 수 있습니다.

제품명 : Flood Light [300,400,600,800,1000,1200,1500W]

제품사양서

모 델 명	소비 전력 (W)	입력 전압 (Vac)	역률 (PF)	광효율 (lm/W)	총광속 (lm)	색온도 (K)	연색 지수 (Ra)	빔각도	사용 온도 (℃)
SML300H-(DB20)	300	220	0.9 이상	180	54 000	5700	75	20°/30°	-20~40
SML400H-(DB20)	400	220	0.9 이상	170	68 000	5700	75	20°/30°	-20~40
SML600H-(DB20)	600	220	0.9 이상	180	108 000	5700	75	20°/30°	-20~40
SML800H-(DB20)	800	220	0.9 이상	170	136 000	5700	75	20°/30°	-20~40
SML1000H-(DB20)	1,000	220	0.9 이상	180	180 000	5700	75	20°/30°	-20~40
SML1200H-(DB20)	1,200	220	0.9 이상	170	204 000	5700	75	20°/30°	-20~40
SML1500H-(DB20)	1,500	220	0.9 이상	170	255 000	5700	75	20°/30°	-20~40

제품명 : Flood Light [300,400,600,800,1000,1200,1500W]

배광 DATA

